


GRUPO 400 VÁLVULA DE RETENCIÓN

MOD. 420A/24



**DAVINCI
VALVES™**

FICHA TÉCNICA

Serie INDUSTRIA

**VÁLVULA DE RETENCIÓN DE
DOBLE PLACA TIPO WAFER CF8M**

**DAVINCI
VALVES™**



**QUALITY
ASSUREMENT**

**DAVINCI
VALVES™**



**PRODUCT QT
ASSUREMENT**

**DAVINCI
VALVES™**



**COMPANY QT
ASSUREMENT**

www.davincivalves.com

18 Dongyu Street, Square One,
11th Floor 1101, Jinjiang District,
Chengdu, Sichuan CHINA

10F/Tower A, Billion Center,
1 Wang Kwong Road, Kowloon Bay
Kowloon HONG KONG

VÁLVULA DE RETENCIÓN DE DOBLE PLATO TIPO WAFER CF8M Ref.420 / PN 10-16-ANSI150#

APLICACIÓN:

Adecuado para uso en industria, sistemas de calefacción / refrigeración y otros

CARACTERÍSTICAS GENERALES:

Rango desde ND40 hasta ND600.

Junta vulcanizada.

Montaje en flujo ascendente en posición horizontal y vertical

ESTANDARES:

Distancia entre caras: API598 en-558-1 serie 16

Sellado al 100% según: ISO 5208 Tasa A.

Montaje entre bridas: PN10 / PN16 / ANSI150 EN 1092-2.

Prueba de presión: EN 12266-1, DIN 3230, BS6755 e ISO 5208:

Cuerpo: 24 bar. Asiento: 17,6 bar.

Fabricación acc. según los requisitos de la directiva de la UE 2014/68 / UE

Equipo bajo presión: Cat. III mod. H


CONDICIONES DE TRABAJO:

Presión máxima de trabajo: 16 bar.

Temperatura máx. De trabajo: -26 ° C / +205 ° C

Medios adecuados: agua, aceite, gas, otros.

Consulte con la fábrica para otras aplicaciones

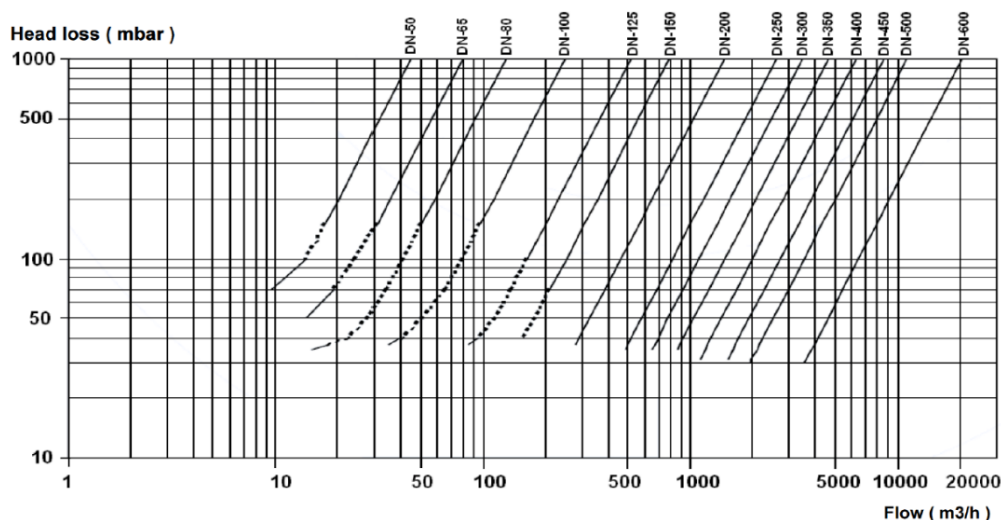

DN ND	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
Presión (mbar) Pressure (mbar)	42	42	42	38	30	26	25	18	17	16	15	13	13	10	9

All the components can be substituted with equivalent or higher-class materials.


DAVINCI VALVES LTD, is constantly looking at all ways of improving our products and services related to the water, fire and industry sector and therefore we reserve the right to change, without prior notice, any of the data contained here. Please contact our Technical Sales Department for detailed advice.

© 2018 DAVINCI VALVES LTD.

www.davincivalves.com info@davincivalves.com +34 616553797 / +86 17340168233

VÁLVULA DE RETENCIÓN DE DOBLE PLATO TIPO WAFER CF8M

Ref.420 / PN 10-16-ANSI150#

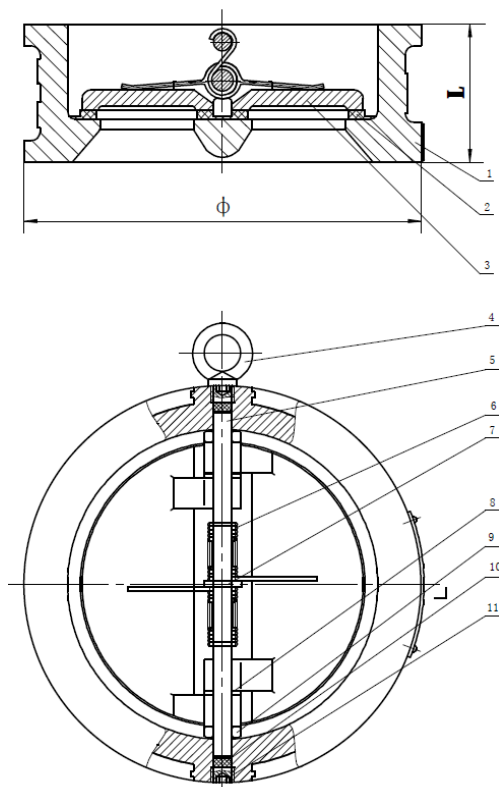

ND	A	L	Peso
50	107	43	1,8
65	127	46	3,2
80	142	64	4
100	162	64	5,2
125	192	70	7,2
150	218	76	8,5
200	273	89	16
250	328	114	28
300	378	114	47

ARTICULO	PARTE	MATERIAL	CANT
1	Cuerpo	CF8M	1
2	Asiento	VITON	1
3	Discos	CF8M	2
4	Gancho	SS316	1
5	Eje	SS316	2
6	Muelle	SS316	4
7	Empaquetadura	F4	1
8	Empaquetadura	F4	1
9	Empaquetadura	F4	2
10	Casquillo	F4	2
11	Tornillo	25	4


All the components can be substituted with equivalent or higher-class materials.

DAVINCI VALVES LTD, is constantly looking at all ways of improving our products and services related to the water, fire and industry sector and therefore we reserve the right to change, without prior notice, any of the data contained here. Please contact our Technical Sales Department for detailed advice.

© 2018 DAVINCI VALVES LTD.

www.davincivalves.com info@davincivalves.com +34 616553797 / +86 17340168233

"For professionals who wants more"



DAVINCI
VALVES™

www.davincivalves.com