


**GROUP 300
STRAINERS
MOD. 320/62**



**DAVINCI
VALVES™**

**TECHNICAL
DATA SHEET**
INDUSTRY Series

Y STRAINER CF8M THREAD END PN16

**DAVINCI
VALVES™**



**QUALITY
ASSUREMENT**

**DAVINCI
VALVES™**



**PRODUCT QT
ASSUREMENT**

**DAVINCI
VALVES™**



**COMPANY QT
ASSUREMENT**

www.davincivalves.com

18 Dongyu Street, Square One,
11th Floor 1101, Jinjiang District,
Chengdu, Sichuan CHINA

10F/Tower A, Billion Center,
1 Wang Kwong Road, Kowloon Bay
Kowloon HONG KONG

Y STRAINER SS316 800WOG THREAD END

Ref.320A

APPLICATION:

Potable water distribution and pumping,
sewage, irrigation

WORKING CONDITIONS:


Pressure Ratings: 800 PSI
Working Temperature: -30°C +150°C
Suitable Media: Water Oil Gas
End connection: Thread end GAS/NPT
Consult Factory for other applications

GENERAL CHARACTERISTICS:



Size Range: 1/4"~2"
Full bore.

STANDARDS:

Pressure Test: API 598, EN 12266
Body: 800 psi WOG
Thread: ASME B1.20.1 BS21.DIN2999/259, ISO228-1, JIS B 0203, ISO7/1

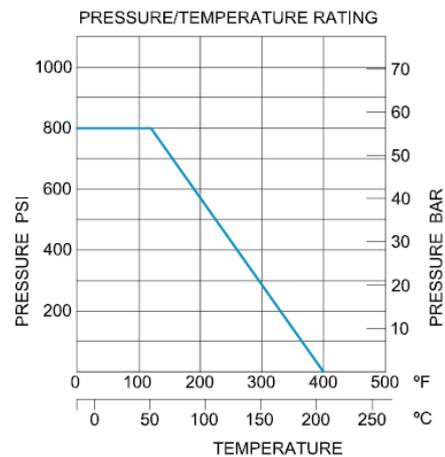

ND	A	B	H	L	W	d	Kgs.
1/4"	15	26	58	65	2	1	0,225
3/8"	15	26	58	65	2	1	0,225
1/2"	15	26	58	65	2	1	0,225
3/4"	20	33	68	78,5	2	1	0,365
1"	25	41	88	89	2	1	0,655
1.1/4"	32	49	100	105	2	1	0,86
1.1/2"	40	56	108	120	2	1	1,1
2"	50	69	130	140	2	1	1,825

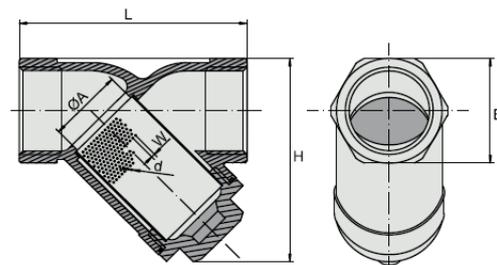


MATERIALS		
1	BODY	S. S. 316
2	SCREEN	S. S. 316
3	GASKET	PTFE
4	CAP	S. S. 316

All the components can be substituted with equivalent or higher-class materials.

DAVINCI VALVES LTD, is constantly looking at all ways of improving our products and services related to the water, fire and industry sector and therefore we reserve the right to change, without prior notice, any of the data contained here. Please contact our Technical Sales Department for detailed advice.

© 2018 DAVINCI VALVES LTD.
www.davincivalves.com info@davincivalves.com +34 616553797 / +86 17340168233

"For professionals who wants more"



DAVINCI
VALVES™