


**GRUPO 200
COMPUERTA
MOD. 200A/09**



**DAVINCI
VALVES™**

FICHA TECNICA

WATER Series

**VÁLVULAS DE COMPUERTA DE CIERRE
ELÁSTICO HUSILLO FIJO F4 EXTREMOS
PARA TUBO DE PVC/PE**

**DAVINCI
VALVES™**



**QUALITY
ASSUREMENT**

**DAVINCI
VALVES™**



**PRODUCT QT
ASSUREMENT**

**DAVINCI
VALVES™**



**COMPANY QT
ASSUREMENT**

www.davincivalves.com

18 Dongyu Street, Square One,
11th Floor 1101, Jinjiang District,
Chengdu, Sichuan CHINA

10F/Tower A, Billion Center,
1 Wang Kwong Road, Kowloon Bay
Kowloon HONG KONG

VALVULA DE COMPUERTA CIERRE ELASTICO EXTREMOS PARA TUBERIA DE PE/PVC

APLICACIÓN:

Distribución de agua potable y bombeo, alcantarillado, riego.

ESTANDARES:

Diseño: DIN 3352. Fabricación según: EN 1074-2.

Distancia entre caras: EN 558-1 Serie 15. Montaje para tubos de PVC/PE

Prueba de presión: EN 12266-1 Tasa A. Cuerpo: 24 bares. Asiento: 17,6 bares.

CARACTERÍSTICAS GENERALES:

Rango desde ND40 hasta ND300

100% de estanqueidad en ambos sentidos.

Mínima pérdida de carga.

Cambio de juntas bajo presión de tubería.

Bajos valores de par.


Pintura epoxi 250 micras Certificado WRAS para agua potable

CONDICIONES DE TRABAJO:

Clasificaciones de presión: 1.0Mpa; 1.6Mpa

Temperatura de trabajo: -10°C + 80°C

Medios adecuados: agua

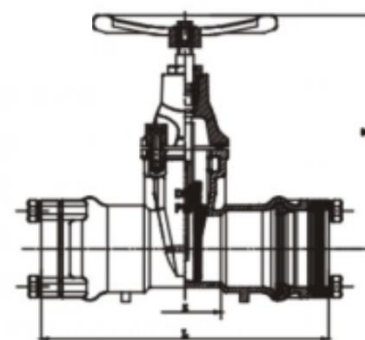

PARTE	MATERIAL
CUERPO	QT500-7
COMPUERTA	QT500-7/EPDM
TUERCA HUSILLO	ZCuZn38
EJE	2Cr13
JUNTA TAPA	EPDM
TAPA	QT500-7
JUNTAS EJE	EPDM
TUERCA	HPb59-1
GUARDAPOLVO	NBR
TUERCA	HPb59-1
TORNILLOS	ACERO 8,8

DN/OD	H	L
40/50	85	210
50/63	85	220
60/75	90	250
80/90	99	280
100/110	114	325
125/125	114	365
125/140	125	365
150/160	140	405
150/180	150	405
200/200	150	500
200/225	170	500
250/250	160	595
300/315	180	680


All the components can be substituted with equivalent or higher-class materials.

DAVINCI VALVES LTD, is constantly looking at all ways of improving our products and services related to the water, fire and industry sector and therefore we reserve the right to change, without prior notice, any of the data contained here. Please contact our Technical Sales Department for detailed advice.

© 2018 DAVINCI VALVES LTD.

www.davincivalves.com info@davincivalves.com +34 616553797 / +86 17340168233
18 Dongyu Street, Square One 11th Floor 1101. Jinjiang District, Chengdu, Sichuan Province, China

"For professionals who wants more"



DAVINCI
VALVES™